



KUSEL CUSTOM TRENCH DRAIN INFORMATION FORM


(Please Circle Your Choices)

Drain Material and Finish:

Stainless Steel ____ Gauge (12 GA Standard)
 Type 304 Type 316 (Type 304 Standard)
 Standard industrial finish with welds sandblasted Other _____

Drain Dimensions:

Overall Length: _____ Feet
 Critical Width:
 Trough (D): ____ Grate (E): ____ Overall (B): ____
 (Please specify one (1) "critical" width)
 Critical Depth (C):
 Shallow End: ____ (3-5/8" min) Outlet End: ____
 (Please select only one depth; slope will determine the other – Leave blank if not critical)

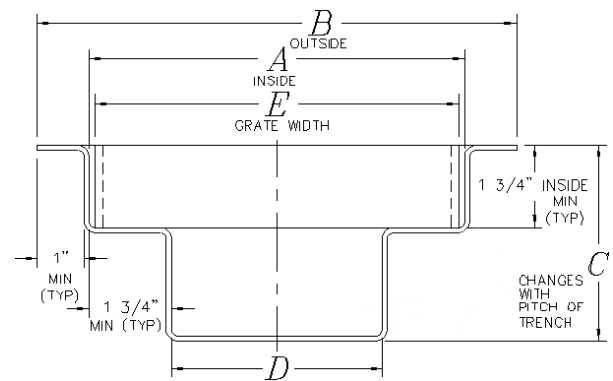

Drain Specifications:

Slope: 1/4" per ft 1/8" per ft Other _____
 Trough Bottom Type: "V" "U" "Flat" (Flat Standard)
 Setting Tabs: No Yes (____ inch spacing)
 Outlet Diameter: 2" 3" 4" 6" ____
 Outlet Schedule: 40 10 Other ____ (Sch 40 Standard)
 Outlet Location: End Center ____ Inch from end
 Sump Options: None (outlet only) KE Series Other (Please describe)
 Outlet Strainer: Yes No

Grating Options:

Open Slot Stainless Steel Grate
 {10 GA Bearing Bars on 1-1/2" Centers, 8 GA Side Banding Bars, Continuous welds, Standard Industrial Finish}
 Solid Plate Stainless Steel Grate
 {1/2 Inch Thick Solid Stainless Steel Plate, 1/2 Inch Drain Gap, Continuous welds, Standard Industrial Finish}
 Other Grate Specifications: _____

Comments: _____

Drains may be in multiple sections to accommodate shipping and field installation when requested.
 (Standard Shipping - 20 Feet Maximum)

KUSEL EQUIPMENT also offers a complete line of Drains, P-Traps and Clean-Outs in Stainless Steel.